


- 1 Open luggage box (1) cover (2)
- 2 Remove wiring harness (3) from bracket (4) and lay down to side together with vacuum line (5).
- 3 Release catch hooks (3) one after another. Simultaneously pull cover (2) out of mounts on luggage box (1)
- 4 Install in the reverse order.

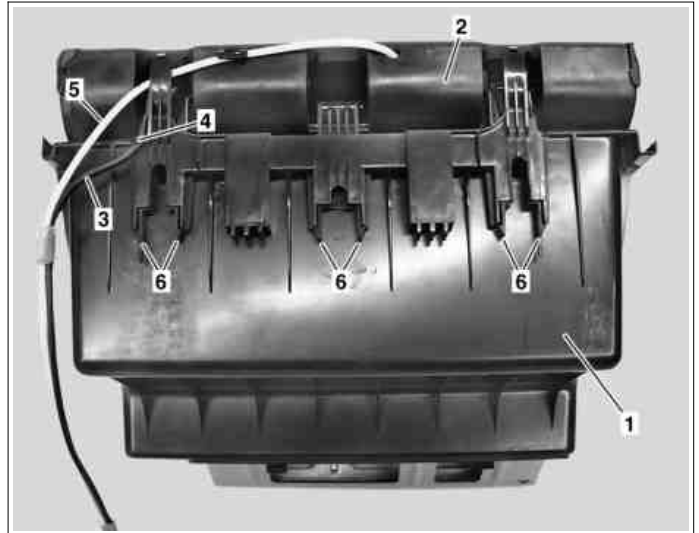

P68.30-2418-11