
$\fbox{\ensuremath{\overline{\mathbf{i}}}}$ Upper center console cover (2) is removed

- 1 Unscrew bolts (3, 4).
- 2 Remove retaining plate (1) out of center pillar

i Installation: Ensure that arrests (5) are seated correctly on sheet metal edge in center pillar (arrows).

3 Install in the reverse order.

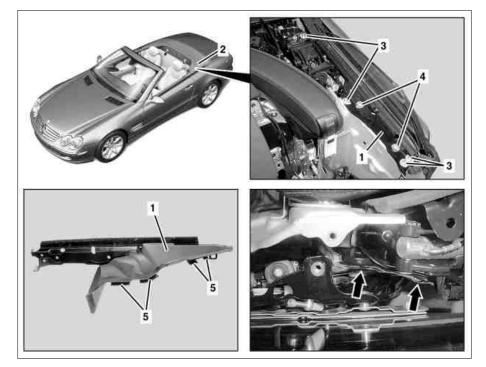

P67.39-2025-06