


MODEL 230.4

Shown on model 230.4 without code (P99) Special model "AMG Black Series"

- 1 Passenger-side wiper arm
- 2 Driver-side wiper arm
- 3 Covers

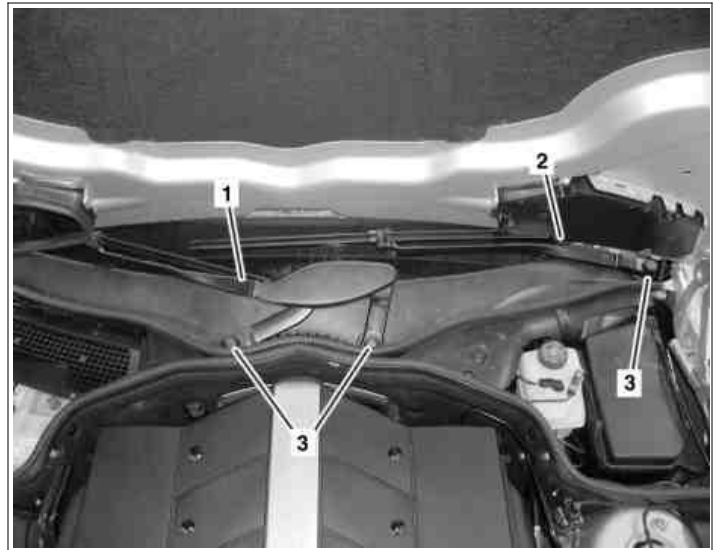

P82.30-2144-11

☒ ☒	Remove/install		
⚠ Danger!	Risk of injury caused by moving parts that can pinch, crush or, in extreme cases even sever extremities.	Always remove ignition key when working on windshield wiper mechanism.	AS82.30-Z-0001-01A
1	Move wiper system to parking position		
2	Switch off the ignition and remove the transmitter key from the EIS control unit	i On vehicles with code (889) Keyless-Go, press KEYLESS-GO start/stop button repeatedly until ignition is switched off. Remove KEYLESS-GO chip card or transmitter key from the vehicle and store outside the transmitter range (at least 2 m)	
3	Open engine hood		AR88.40-P-1000R
4	Remove cover (3) from passenger-side wiper arm (1) or driver-side wiper arm (2)		
5	Unscrew nut at passenger-side wiper arm (1) or driver-side wiper arm (2) and remove passenger-side wiper arm (1) or driver-side wiper arm (2)	i Installation: The wiper blade must be positioned on the respective marking at the windshield. Nm	*BA82.30-P-1004-01A
6	Install in the reverse order		

Nm Windshield wiper

Number	Designation	Model 230	
BA82.30-P-1004-01A	Nut on wiper arm	Nm	33