

Cabin Air Filter Installation Instructions

LOCATION OF FILTER: BEHIND PASSENGER SIDE OF INSTRUMENT PANEL

INSTALLATION: MODERATE, 15 TO 20 MINUTES

INSTALLATION INSTRUCTIONS:

Refer to Figure 1:

- Unscrew three bolts from the cover under the right side of the instrument panel.

Refer to Figure 2:

- Pull cover toward rear of vehicle until the electrical connector of the right foot-well lamp is accessible. Unplug the lamp and remove the cover.

Refer to Figure 3:

- Remove the Cabin Air Filter covers by pushing the retaining clamps in the direction of the arrows.

Refer to Figure 4:

- Remove each of the Cabin Air Filters from their housings by pulling them down out of the AC unit.

- Install the new Cabin Air Filters in reverse of removal.

NOTE: Servicing the Cabin Air Filter requires replacement of two Cabin Air Filter elements

- Reverse the above steps to reassemble the Cabin Air Filter Housing Access Panel covers and lower right side instrument panel cover.

Fig. 1

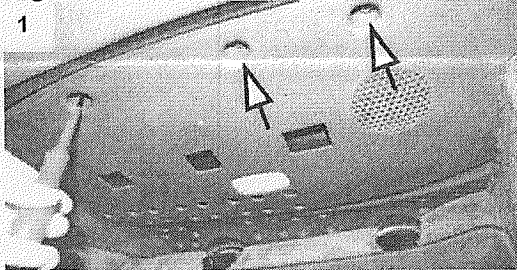


Fig. 2

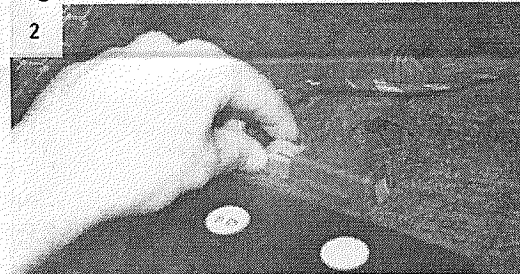


Fig. 3


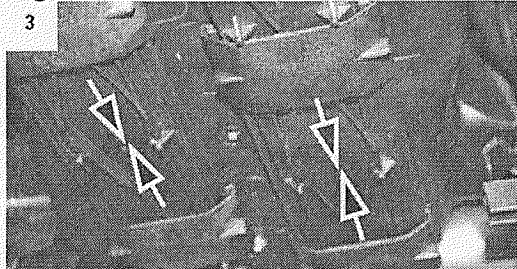


Fig. 4

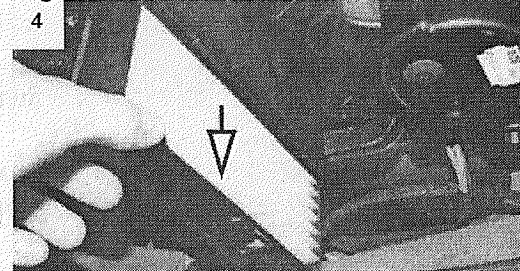

!!!!CAUTION!!!!

ENSURE THAT THE VEHICLE
ENGINE IS TURNED OFF
BEFORE PERFORMING THIS
CABIN AIR FILTER
REPLACEMENT PROCEDURE