

1. While the SAM is out, route connector E cable along rear fender and under tail light (sorry picture is blurry and not sure why the text turned sideways after saving image)




2. Run the cable to the striker eye area:



The connector feeds in from the right and connects to power striker eye.

Below is a picture of the power striker installed (viewed from inside the trunk). It is composed of two parts (forgot to take pic) 1. The motor part is where the connector plugs into, this goes behind the chassis mount. 2. The moving striker is the part that goes on top.:

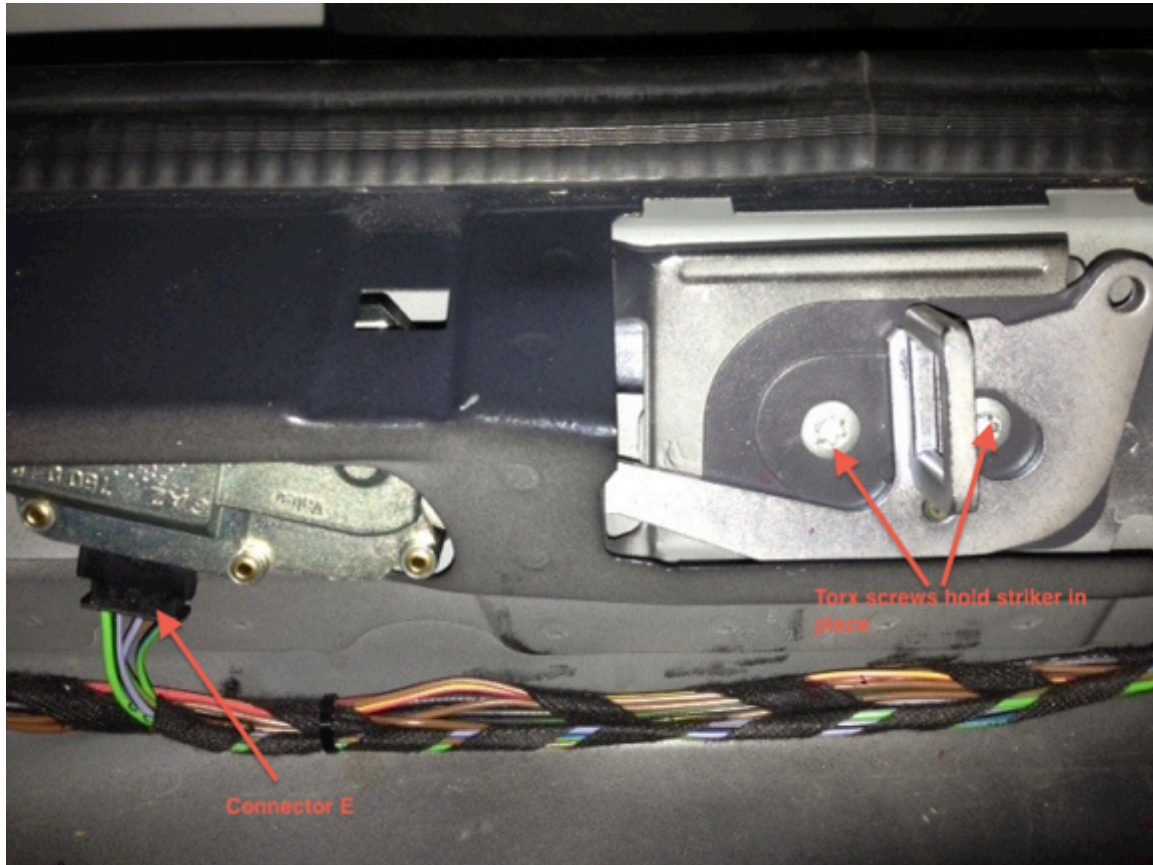

The way it functions is that when you press the button to close the trunk, the striker eye moves to the up position while the motor closes the trunk lid. The trunk closes onto the striker in the up position and pulls it down.