
BRAKE ROTOR SET UP SHEET, SOLID MOUNT

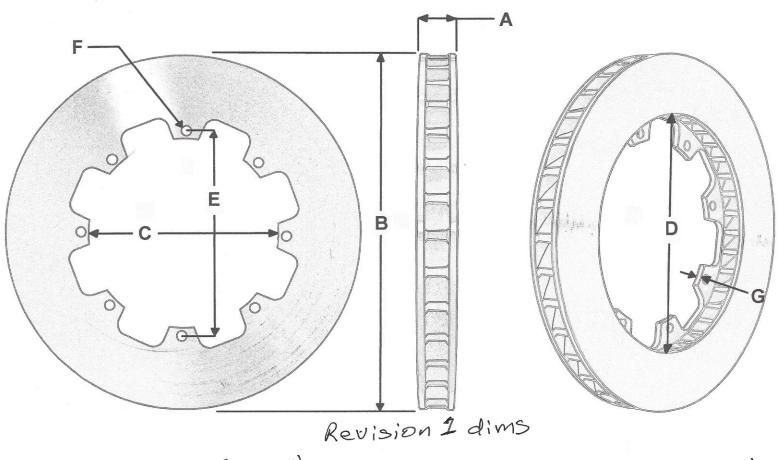

| A= Thickness 36.0 mm (1.417") | G = Flange Thickness 7-0 mm (0.2755") |
|-----------------------------------|---|
| B= Diameter 390 (15,3541) | Flange Step Out |
| C = Flange Diameter 205 (8.070") | Flange Step In N/A |
| D = Eye Diameter $245 mm (9.645)$ | Step Diameter_W/A |
| E = Bolt Circle 225mm (8.858") | Your rotor may or may not have a step or steps in the face. Only fill out |
| F = Hole Size 900mm (0.3541) A | the required information if you have steps. We also need to know if your rotor |
| No. Of Holes_/O | has any options such as gas vents, cross drilling or is stress relieved. |

Note: All custom rotors must have a spec sheet, blueprint or a sample part. We can not make custom rotors with sizes provided over the phone. All spec sheets must be signed and dated.

| Approved B | y: Bro Me | |
|------------|---------------|--|
| | Date: 6-12-14 | |