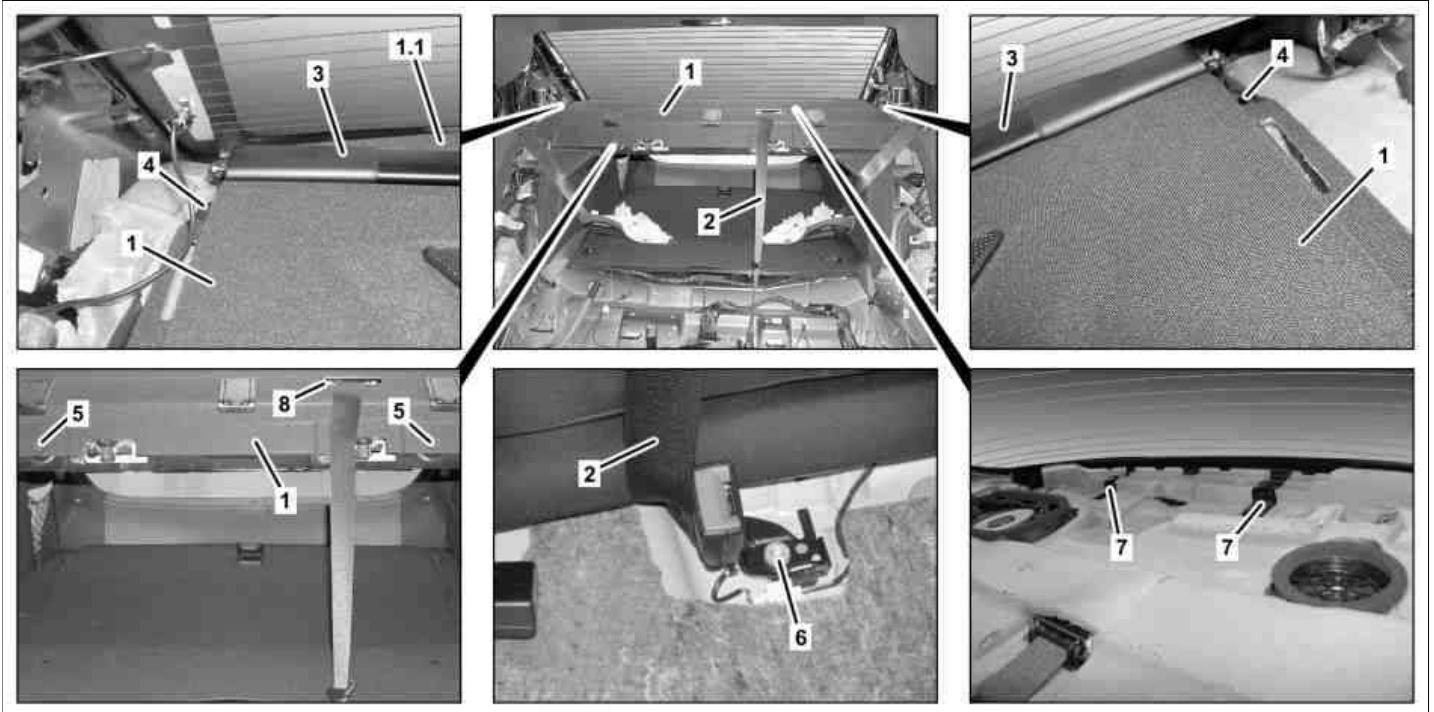


MODEL 212.0/1

## Modification notes

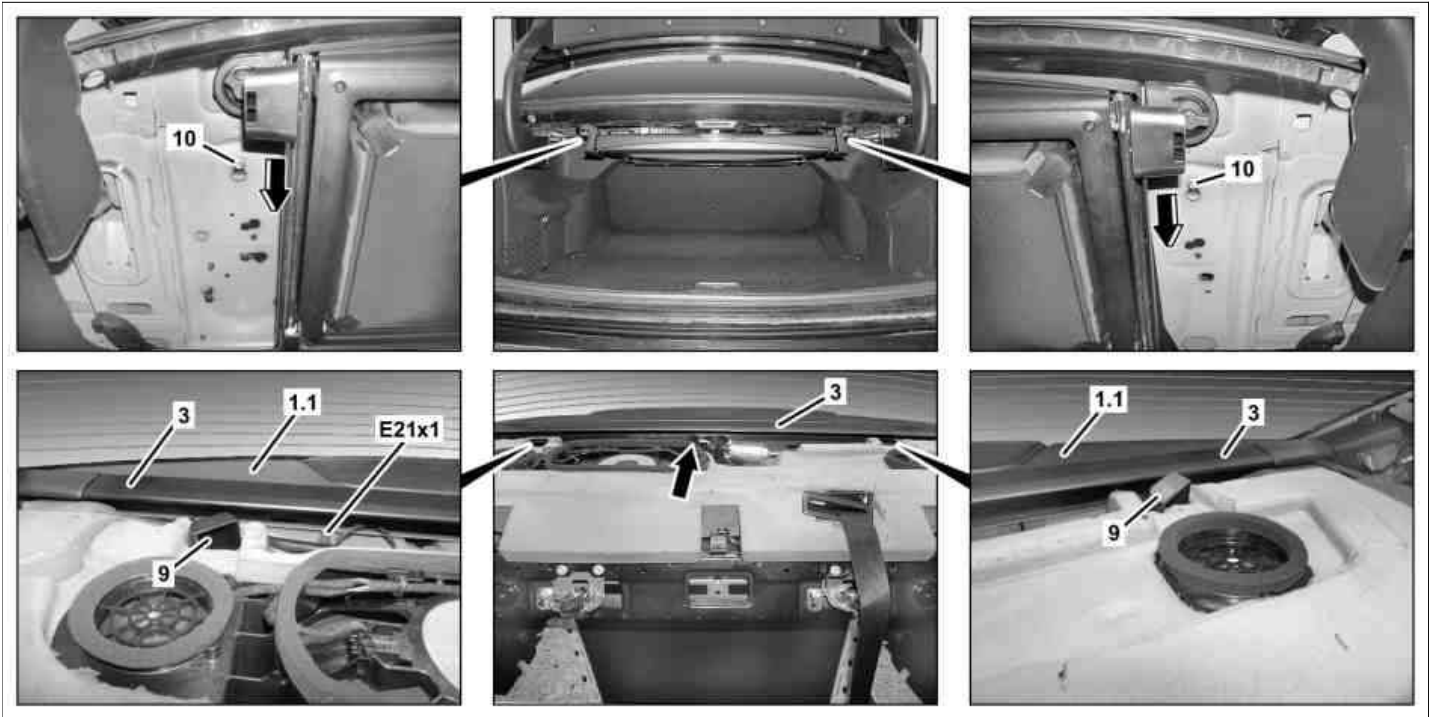
8.12.10	Remove rear window, on vehicles with code (Z04) Light armoring added	Operation step 4	AR67.20-P-2000EG
---------	--	------------------	------------------



P68.30-3419-09

## Shown with code (540) Electric rear window roller blind

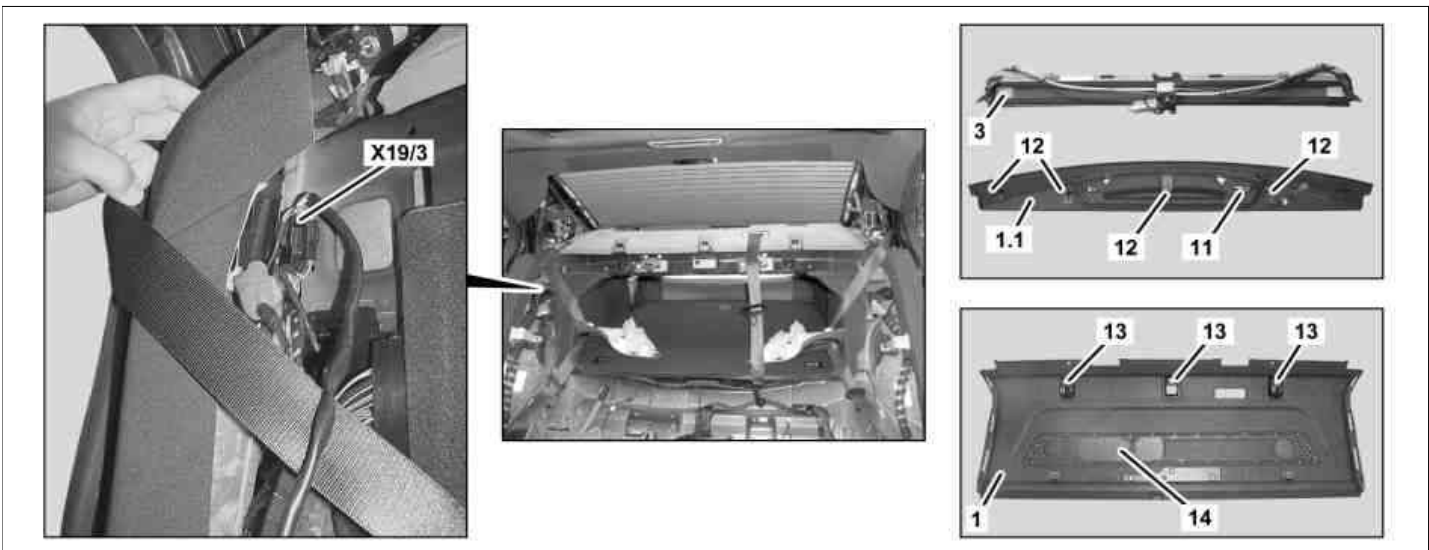
1	Rear shelf	3	Roller sun blind (with code (540) Electric roller blind for rear window )	6	Screw
1.1	Rear shelf rear section (with code (540) Electric roller blind for rear window )	4	Clip	7	Guide
2	Center seat belt	5	Expansion clip	8	Frame



P68.30-3420-09

**With code (540) Electric rear window roller blind**







- |     |  |    |       |       |  |
|-----|--|----|-------|-------|--|
| 1.1 | Rear shelf rear section (with code (540) Electric roller blind for rear window ) | 9  | Guide | E21x1 | Center brake lamp electrical connector |
| 3   | Roller sun blind (with code (540) Electric roller blind for rear window )        | 10 | Screw |       |  |



P68.30-3421-08

**Shown with code (540) Electric rear window roller blind**

- |     |  |    |                         |       |   |
|-----|--|----|-------------------------|-------|---|
| 1   | Rear shelf   | 11 | Center brake lamp cover | 14    | Speaker cover   |
| 1.1 | Rear shelf rear section (with code (540) Electric roller blind for rear window ) | 12 | Supports                | X19/3 | Rear window roller sun blind motor electrical connector |

	<b>Risk of injury</b> caused by fingers being jammed or pinched when removing, installing or aligning hoods, doors, trunk lid/rear-end door or sliding roof.	No parts of the body or limbs should be within the operating area when the components are moving.	AS00.00-Z-0011-01A
	Notes on sensor system for trunk lid opening/closing		AH80.61-P-0001-01A
	<b>Remove/install</b>		
1.1	Remove rear seat backrest	MODEL 212.0/1 without CODE 224 (Rear individual seat design) without CODE 287 (Through-loading feature)	AR91.12-P-1620CW
1.2	Remove rear seat backrest	MODEL 212.0/1 with CODE 224 (Rear individual seat design)	AR91.12-P-1620EW
1.3	Remove side upholstery	MODEL 212.0 with CODE 287 (Through-loading feature)	AR91.12-P-1710CW
2	Unscrew bolt (6) and remove belt end fitting from center seat belt (2)		
3	Loosen paneling on left and right C-pillar and lay down to side with seat belts installed	 Do not remove belt end fittings.	AR68.30-P-4490EW
4	Remove rear wall window	MODEL 212.0 with CODE Z04 (Light armoring)	AR67.20-P-2000EG
5	Remove rubber from left and right expansion clip (5) and remove expansion clips (5)		
6	Remove clips (4)	MODEL 212.0/1 with CODE 540 (Electric roller blind for rear window)	
7.1	Pull rear shelf (1) toward front out of guides (7)	MODEL 212.0/1 without CODE 540 (Electric roller blind for rear window)	
7.2	Pull rear shelf (1) toward front out of guides (9) and guide (arrow)	MODEL 212.0/1 with CODE 540 (Electric roller blind for rear window)	
8	Lift rear shelf (1) and disconnect electrical connector on center brake lamp (E21x1)	MODEL 212.0/1 without CODE 540 (Electric roller blind for rear window)	
9	Unclip frame (8) from rear shelf (1), guide center seat belt (2) through opening in rear shelf (1) and remove rear shelf (1)		
10	Turn guides (9) 45° counterclockwise and remove	MODEL 212.0/1 with CODE 540 (Electric roller blind for rear window)	
11	Loosen bolts (10) in trunk, push roller sun blind (3) in direction of arrow and guide bolts (10) out of holes	MODEL 212.0/1 with CODE 540 (Electric roller blind for rear window)	
12	Disconnect electrical connector on rear window roller sun blind motor (X193) and remove rear shelf rear section (1.1) with roller sun blind (3) until center brake lamp electrical connector (E21x1) is accessible	MODEL 212.0/1 with CODE 540 (Electric roller blind for rear window)	
13	Disconnect center brake lamp electrical connector (E21x1) and remove rear shelf rear section (1.1) with roller sun blind (3)	MODEL 212.0/1 with CODE 540 (Electric roller blind for rear window)	
14	Install in the reverse order		
	<b>Disassemble/assemble</b>		
15	Remove roller sun blind (3) from rear shelf rear section (1.1)	 <b>Installation:</b> Ensure that roller sun blind (3) is inserted into mounts (12).	
16	Unclip center brake lamp cover (11) from rear shelf rear section (1.1) or rear shelf (1) and remove	 Depending on vehicle equipment.	
17	Unclip loudspeaker cover (14) and top tether cover (13) from rear shelf (1) and remove		

