


MODEL 212.0/1
 up to model year 2014
 with CODE 810 (Sound system)
 MODEL 218
 with CODE 810 (Sound system)

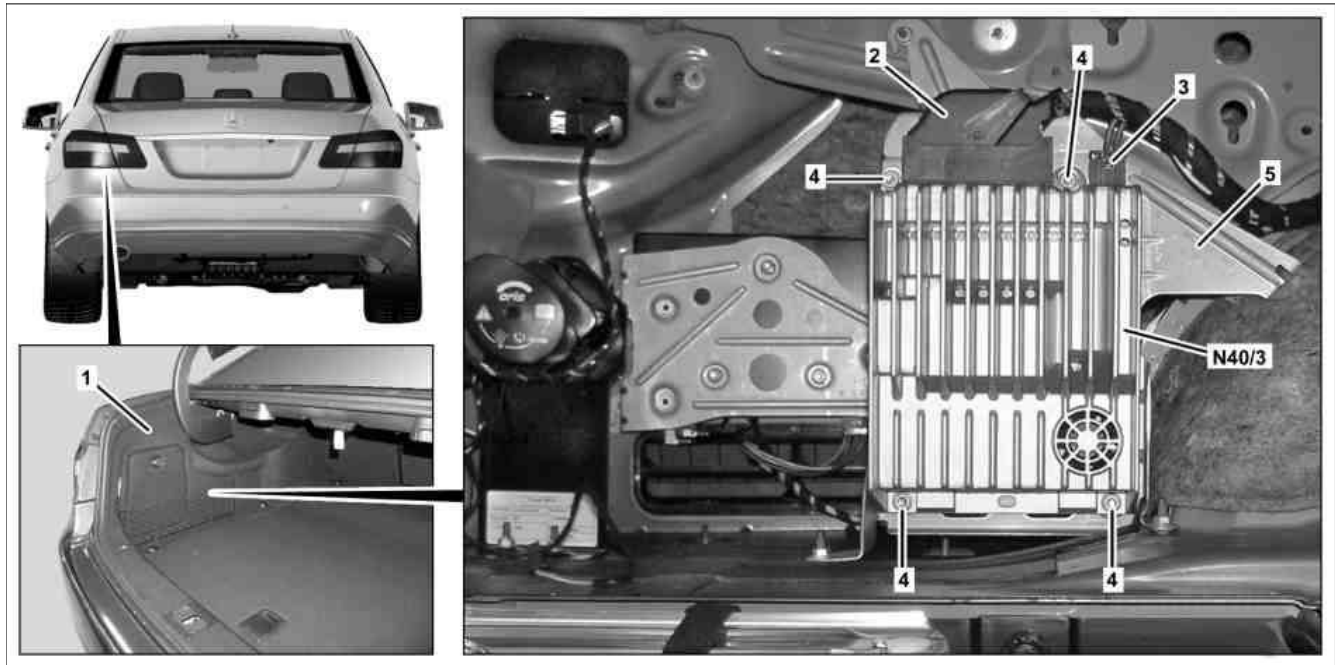


P82.62-3490-09

Shown on model 212.0

- | | | | | | |
|---|----------------------|---|--|-------|-------------------------------------|
| 1 | Left side paneling | 3 | Electrical connection with fiber optic cable | 5 | Bracket |
| 2 | Electrical connector | 4 | Nut | N40/3 | Sound system amplifier control unit |

MODEL 218.9

- 7 Cover
- 8 Left rear side lining

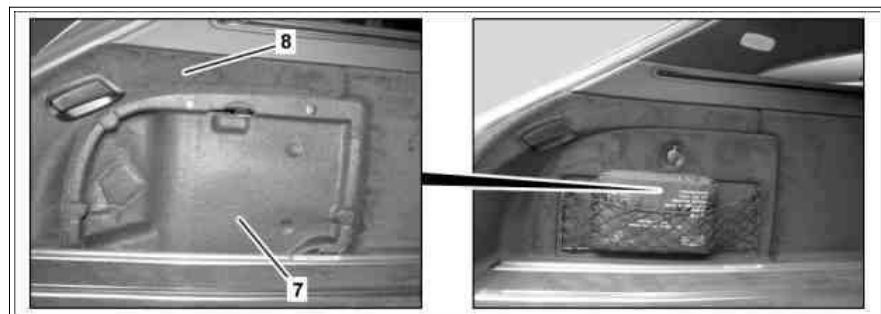

P82.62-4227-04

ⓘ	Information on preventing damage to electronic components due to electrostatic discharge	AH54.00-P-0001-01A
ⓘ	Notes on avoiding damage to optical fibers during repair work	AH82.60-P-0001-05AK
⊠ ⊠	Remove/install	

1	Connect diagnostic system and perform initial startup of sound system amplifier control unit (N40/3)	When replacing sound system amplifier control unit (N40/3). i Installation: Transfer buffered basic data to new sound system amplifier control unit (N40/3).	AD00.00-P-2000-04A
2.1	Switch off ignition and remove transmitter key from electronic ignition lock control unit	MODEL 212.0/1 up to model year 2014 with CODE 810 (Sound system) without CODE 889 (KEYLESS-GO) MODEL 218 with CODE 810 (Sound system) without CODE 889 (KEYLESS-GO)	
2.2	Switch off ignition and remove transmitter key or KEYLESS-GO start/stop button from electronic ignition lock control unit	MODEL 212.0/1 up to model year 2014 with CODE 810 (Sound system) with CODE 889 (KEYLESS-GO) MODEL 218 with CODE 810 (Sound system) with CODE 889 (KEYLESS-GO)	
3.1	Remove left side paneling (1)	MODEL 212.0/1 up to model year 2014 with CODE 810 (Sound system) MODEL 218.3 with CODE 810 (Sound system) MODEL 212.0/1 up to model year 2014 with CODE 810 (Sound system) MODEL 218.3 with CODE 810 (Sound system)	AR68.30-P-4600EW AR68.30-P-4600EL
3.2	Remove cover (7) from left rear side lining (8)	MODEL 218.9 with CODE 810 (Sound system)	AR68.30-P-1180ELX
4	Disconnect electrical connection (2)		
5	Disconnect electrical connector with optical fiber (3) and cover equipment connection at sound system amplifier control unit (N40/3)		
6	Unscrew nuts (4)		
7	Remove sound system amplifier control unit (N40/3) from bracket (5)		
8	Install in the reverse order		