


Pin Connections

Pin Connections

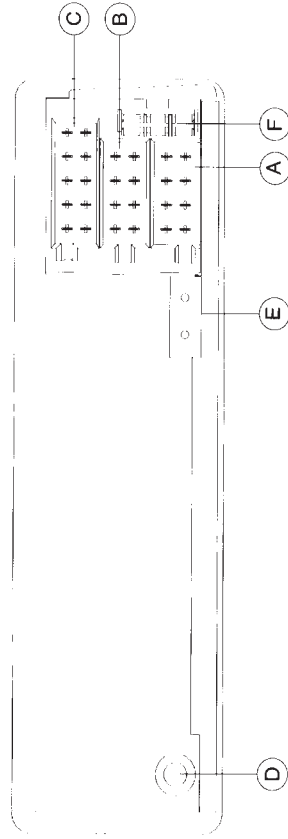

- (A) -1 Speed-dependent volume control
- 2 Diagnostic and configuration
- 3 Telephone muting
- 4 Constant positive (terminal 30)
- 5 Control output for automatic antenna
- 6 Lighting (terminal 38)
- 7 Switched positive (terminal 15)
- 8 Earth (terminal 31)

- (B) -1 Rear right-hand loudspeaker +
- 2 Rear right-hand loudspeaker -
- 3 Front right-hand loudspeaker +
- 4 Front right-hand loudspeaker -
- 5 Front left-hand loudspeaker +
- 6 Front left-hand loudspeaker -

- 7 Rear left-hand loudspeaker +
- 8 Rear left-hand loudspeaker -
- (C) -1 CAN-bus high
- 2 CAN-bus low
- 4 Wake up additional equipment (D2B)
- 5 Constant positive CD changer
- 6 Earth (terminal 31) CD changer

- (D) - Antenna socket
- (E) - D2B connection (covered)
- (F) - Fuse