#### Model 207, 212, 218

#### **Modification notes**

25.03.2014	Brake hose to fixed or floating caliper on front axle		BA42.10-P-1002-04L
03.04.2014	Brake hose to fixed or floating caliper on front axle	MODEL 212.076/092/276/092	BA42.10-P-1002-04L
03.04.2014	Brake hose to fixed or floating caliper on front axle	MODEL 218.376/392/976/992	BA42.10-P-1002-04L

#### Rear brake hose

5 Brake line

51 Brake hose




P42.10-2765-11

#### Front brake hose

5 Brake line51 Brake hose

51a Rubber protective ring

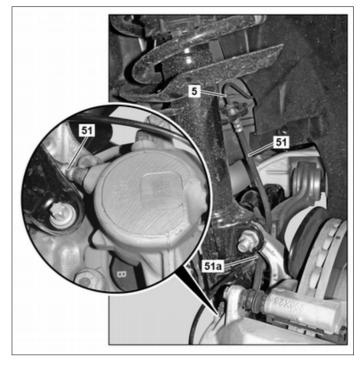

P42.10-2764-12

⚠ Caution	fluid. <b>Risk of injury</b> from skin and eye contact with brake fluid	Only pour brake fluid into suitable and appropriately marked containers. Wear protective clothing and eye protection when handling brake fluid.	AS42.50-Z-0001-01A
	Notes on externally invisible brake fluid loss		AH42.10-P-9406-02A
	Notes on installing brake hoses		AH42.10-P-9406-01A
	Notes on repairs to brake system		AH42.00-P-0003-01A
	Brake fluid notes		AH42.50-P-0001-01A
XX	Remove/install		

1	Remove complete wheel; rotate if necessary		
ı ⊯≆AP	Tremove complete wheel, rotate if hecessary	Model 207	AP40.10-P-4050CW
, Al I≆ AP		Model 212, 218	AP40.10-P-4050EW
2	Detach brake line (5) from brake hose (51)		AF40.10-F-4050EVV
2	Detacti blake lille (3) Itolii blake flose (31)	Seal the connection fittings immediately	
		using $\mathcal{S}$ stop plugs. The expansion reservoir for brake fluid must not run completely empty.	
			*BA42.10-P-1001-04L
		Retaining screw, brake line to brake hose	
		Box wrench bit	*000589750300
			*129589009100
3	Guide brake hose (51) through the rubber	i The protective rubber ring (51a) is present	
	protective ring (51a)	only on the front axle.	
4.1	Detach brake hose (51) from brake caliper of	Model 207	
	front axle and remove	Model 212 (except 212.076/092/276/292)	
		Model 218 (except 218.376/392/976/992)	
		Brake hose to fixed or floating caliper on	*BA42.10-P-1002-04L
		front axle	
		Box wrench	*000589760300
		S Box wrench bit	*000589750300
4.2	Unscrew banjo bolt and remove brake hose of		
	front axle (51)	Model 218.376/392/976/992	
		i Brake hoses with ring fitting and banjo bolt	
		are only installed on the front axle.	
		i Installation: Check sealing rings. If	
		problems occur, brake hose (1) must be replaced.	
		Nm Brake hose to fixed or floating caliper on	*BA42.10-P-1002-04L
		front axle	
5	Detach brake hose (51) from brake caliper of	Nm Brake hose to fixed or floating caliper on	*BA42.10-P-1006-04L
	rear axle and remove	rear axle	
		S Box wrench bit	*000589750300
		Box wrench	*000589760300
6	Install in the reverse order		
7	Bleed brake system		AR42.10-P-0010EW

## Nm Brake lines, brake hoses

Number	Designation			Model 212 (except 212.076/092/276/29 2)
BA42.10-P-1001-04L	Retaining screw, brake line to brake hose	٧m	16	16

# Nm Brake lines, brake hoses

		Model 212.076/092/276/292	Model 218 (except 218.376/392/976/99	
				2)
BA42.10-P-1001-04L	Retaining screw, brake line to brake hose	Nm	16	16

### Nm Brake lines, brake hoses

Number	Designation		Model 218.376/392/976/99 2
BA42.10-P-1001-04L	Retaining screw, brake line to brake hose	Nm	16

# Nm Brake lines, brake hoses

Number	Designation			Model 212 (except 212.076/092/276/29 2)
BA42.10-P-1002-04L	Brake hose to fixed or floating caliper on front axle	١m	24	24

· · · · · · · · · · · · · · · · ·		Model 212.076/092/276/292	Model 218 (except 218.376/392/976/99	
				2)
BA42.10-P-1002-04L	Brake hose to fixed or floating caliper on front axle	Nm	30	24

### Nm Brake lines, brake hoses

Number	Designation		Model 218.376/392/976/99 2
BA42.10-P-1002-04L	Brake hose to fixed or floating caliper on front axle	Nm	30

### Nm Brake lines, brake hoses


Number	Designation		Model 212 (except 212.076/092/276/29
			2)
BA42.10-P-1006-04L	Brake hose to fixed or floating caliper on rear axle	24	24

### Nm Brake lines, brake hoses


Number		Model 212.076/092/276/292	Model 218 (except 218.376/392/976/99
			2)
BA42.10-P-1006-04L	Brake hose to fixed or floating caliper on rear axle	24	24

## Nm Brake lines, brake hoses


Number	Designation	Model 218.376/392/976/99
BA42.10-P-1006-04L	Brake hose to fixed or floating caliper on rear axle	24



Box wrench



Record plug



© Daimler AG, 3/20/19, X/03/19, ar42.10-p-0013ew, Replace brake hoses Model 207, 212, 218