


Mercedes WIS

Čeština Dansk Deutsch Ελληνικά English Español Suomi Français Magyar Italiano 日本語 한국어 Nederlands Polskie Português Română Русский Slovenščina Svenska Türkçe 简体中文

AR54.10-P-0030LW	Remove/install cigarette lighter	13.12.2016
------------------	----------------------------------	------------

Model	205, 213, 238, 253
	with code 301 (Package SMOKER)

P54.10-3991-09

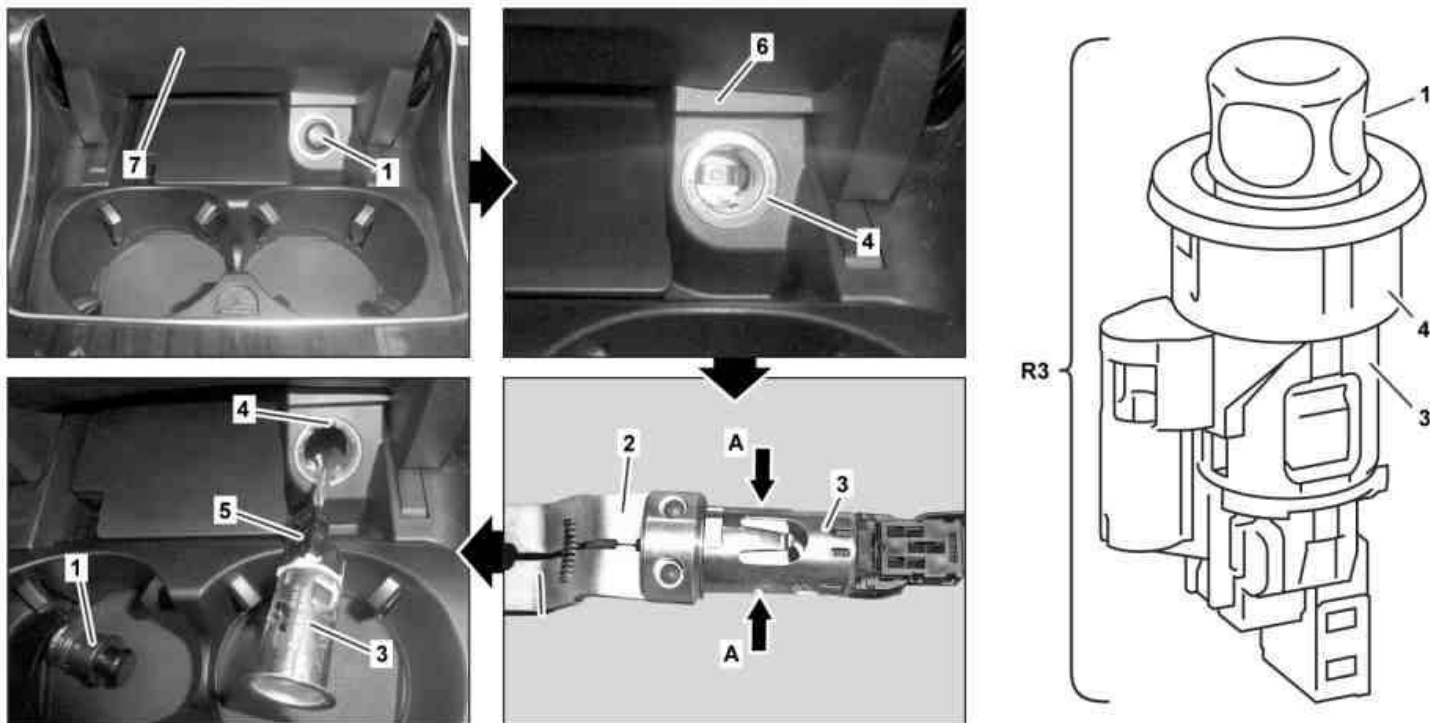

Shown on model 205

1	Insert	5	Electrical connector
2	Pliers	6	Stowage compartment with ashtray
3	Housing	7	Flap
4	Spring pin	R3	Front cigarette lighter with ashtray illumination

	Remove/install		
1	Switch off ignition and store transmitter key outside of transmission range (min. 2 m)		
2	Open flap (7)		
3	Remove insert (1) from housing (3)		
4	Use pliers (2) to release housing (3) and pull out of spring pin (4) far enough until electrical connector (5) is accessible	<p> The studs of the pliers (2) must engage in the cutouts of the housing (3) (arrows A).</p> <p> Pliers</p>	*169589003700
5	Detach electrical connection (5) and remove housing (3)		
6	Unclip spring pin (4) from stowage compartment with ashtray (6) by pushing back the two catch hooks, and then remove it	<p> Installation: Check for correct installation position of spring pin (4).</p>	
7	Install in the reverse order		

Pliers

169 589 00 37 00

