

**wis** \_ □ X

## Werkstattinformationssystem Display Document

Sales designation: **CLK 500**    Vehicle ident. number: **WDB209375\***    Engine number: **113.968**    Automatic transmission: **722633**    Gr.: **27.19**    Entry: Mod.Y.:    Op. no.:

**AR27.19-P-1719Q**    **Remove/install electronic transmission control (ETC) control unit**    Full-size view    Validity **OFF**    Page: **2 / 5**

<b>AR27.19-P-1719Q</b>	<b>Remove/install electronic transmission control (ETC) control unit</b>	<b>1.2.02</b>
------------------------	--	---------------

**TRANSMISSION 722.695 in MODEL 209.342**  
**TRANSMISSION 722.696 in MODEL 209.361**  
**TRANSMISSION 722.618 in MODEL 209.365**  
**TRANSMISSION 722.633 in MODEL 209.375**  
**TRANSMISSION 722.636 in MODELS 209.376, 203.076 /276**

- 1    *Cover*
- 2    *Nuts*
- 3    *Mounting plate*
- 4    *Floor mat*
- N15/3    *ETC control unit*
- N62    *PTS control unit*

Add. Functions

Document Functions

What is new?

Document: 1 / 1

Level: 1


Menu

Help

Previous Screen

**Start**    '04 CLK5...    **wis**    << [System Icons] 20:43

- 1 Cover
- 2 Nuts
- 3 Mounting plate
- 4 Floor mat
- N15/3 ETC control unit
- N62 PTS control unit

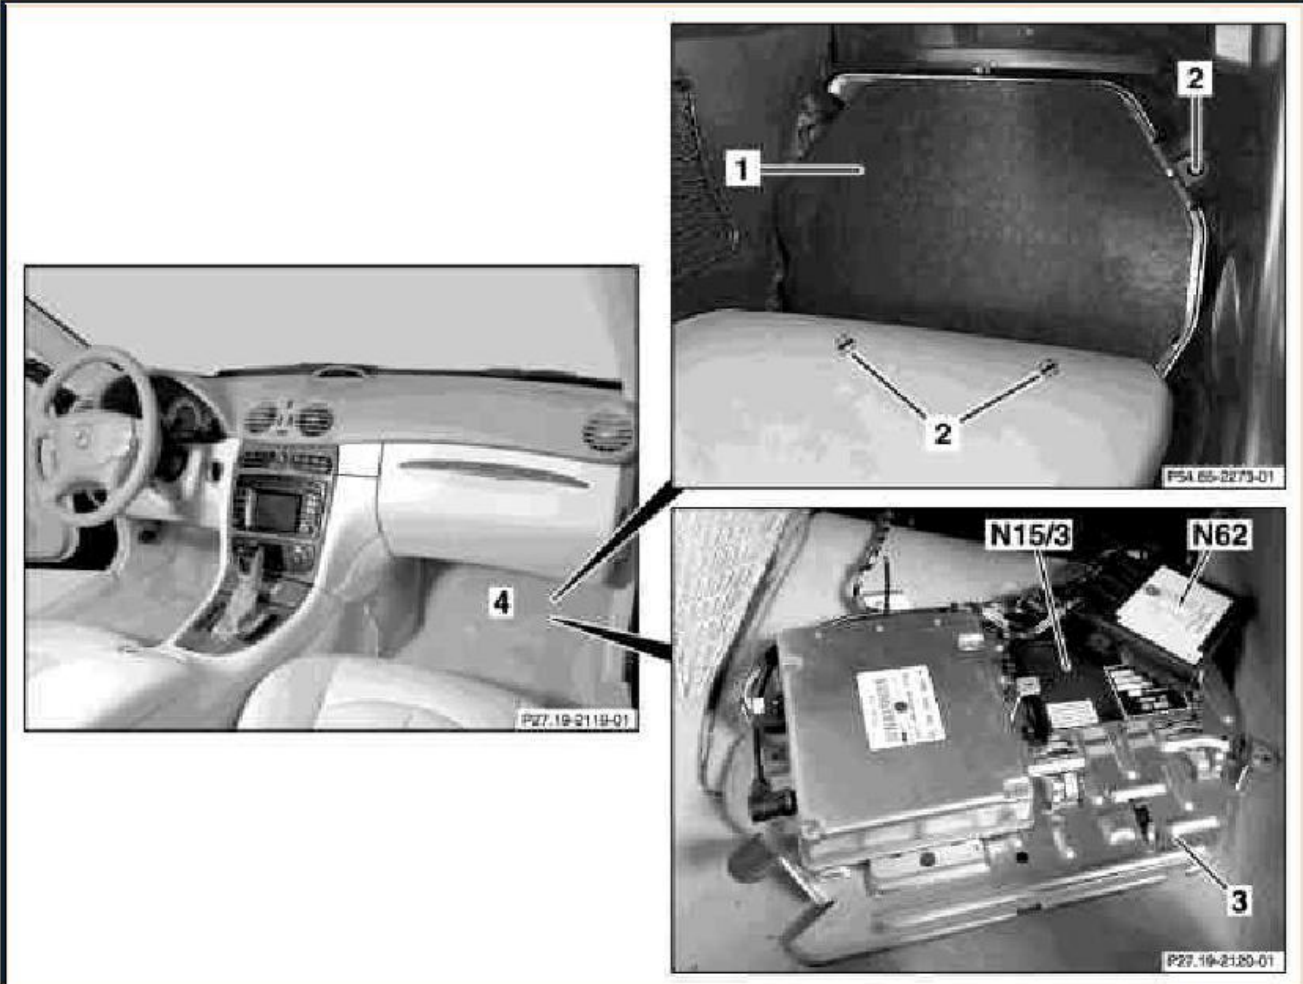

	Remove/Install		
<p>⚠ <b>Danger!</b></p> <p>1</p> <p>ⓘ</p>	<p><b>Risk of explosion</b> caused by oxyhydrogen gas. <b>Risk of poisoning and caustic burns</b> caused by swallowing battery acid. <b>Risk of injury</b> caused by burns to skin and eyes from battery acid or when handling damaged lead-acid batteries</p> <p>Disconnect ground cable of battery</p> <p>Notes on battery</p>	<p>No fire, sparks, open flames or smoking. Wear acid-resistant gloves, clothing and safety glasses. Pour battery acid only into suitable and appropriately marked containers.</p> <p>ⓘ Model 209: Do not connect quiescent current retention unit, otherwise this may cause damage to the control units.</p> <p>Model 209</p> <p>Model 203</p> <p>All models</p>	<p>AS54.10-Z-0001-01A</p> <p>AR54.10-P-0003Q</p> <p>AR54.10-P-0003P</p> <p>AH54.10-P-0001-01A</p>
2	Fold right front floor covering (4) backwards		
3	Take out cover (1)		
4	Unscrew nuts (2) of assembly plate (3)		
5	Fold assembly plate (3) forwards		
6	Unscrew bolts from Parktronic control unit (N62)		
7	Put Parktronic control unit (N62) to one side		

**wis** AR27.19-P-1719Q Remove/install electronic transmission control (ETC) control unit Normal view validity OFF Page: 4/4

5	Fold assembly plate (3) forwards		
6	Unscrew bolts from Parktronic control unit (N62)		
7	Put Parktronic control unit (N62) to one side		
8	Detach couplings from ETC [EGS] control unit (N15/3)		
9	Unscrew bolts from ETC [EGS] control unit (N15/3)		
10	Remove ETC [EGS] control unit (N15/3) from the assembly plate (3)		
11	Install in the reverse order		
12	Read out fault memory Connect STAR DIAGNOSIS and read out fault memory	Diagnosis system STAR DIAGNOSIS	AD00.00-P-2000-04A WE58.40-Z-1013-06A

**Workshop equipment/MB testers (see Workshop Equipment Manual)**

WE58.40-Z-1013-06A	STAR DIAGNOSIS Compact diagnosis system for passenger cars, order number 6511 1801 00
--------------------	---

Start '04 CLK5... wis << 21:03