


N82/1 Vehicle power supply control unit

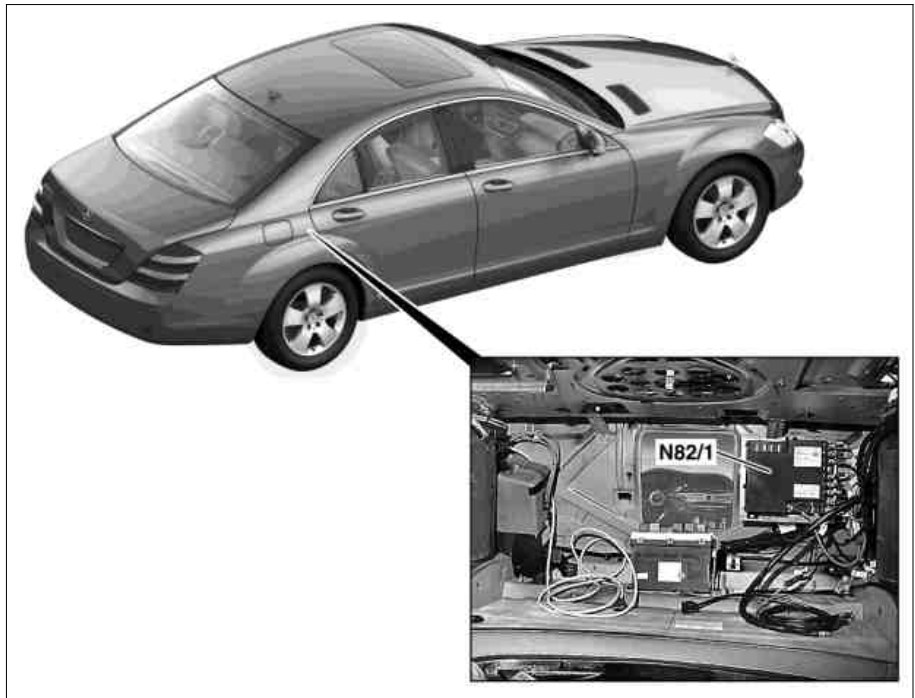

P54.15-2790-06

Fuse	Clamping device	Cable ID (cable fused)	Fused function	Rating in amperes (A)
N82/1f1	30	25.0 RD	<ul style="list-style-type: none"> ● Front prefuse box (F32) (via on-board electrical network line pyrofuse (N82/1f1)) 	-
N82/1f2	30	16.0 RD	Valid for code (597) Heated windshield (model 221): <ul style="list-style-type: none"> ● Heated windshield control unit (N61) 	125
N82/1f3	30	10.0 RD	<ul style="list-style-type: none"> ● Right instrument panel fuse box (F1/6) 	80
N82/1f4	30	16.0 RD	<ul style="list-style-type: none"> ● Rear SAM control unit with fuse and relay module (N10/2) 	200
N82/1f5	30	6.0 RD	Valid for special-purpose vehicles (model 221): <ul style="list-style-type: none"> ● Special vehicle multifunction control unit (SVMCU [MSS]) (N26/9) 	100
N82/1f6	30	16.0 RD	<ul style="list-style-type: none"> ● Rear SAM control unit with fuse and relay module (N10/2) 	150
N82/1f7	30	10.0 RD	<ul style="list-style-type: none"> ● Front SAM control unit with fuse and relay module (N10/1) 	100
N82/1f8	30	10.0 RDWH	<ul style="list-style-type: none"> ● Left instrument panel fuse box (F1/7) 	80
N82/1f9	30	0.75 RDGN	<ul style="list-style-type: none"> ● Front SAM control unit with fuse and relay module (N10/1) 	5
N82/1f10	30	0.75 RD	Valid for code (359) TELE AID emergency call system (model 216): <ul style="list-style-type: none"> ● Emergency call system control unit (N123/4) 	5