

# Service Campaign Bulletin



Mercedes-Benz

Campaign No. 2019030005, April 2019

TO: ALL MERCEDES-BENZ CENTERS

SUBJECT: **Model S-Class and S-Class Coupe vehicles (217 and 222 platforms)  
Model Year 2018-2019**

**Check lock for trunk lid, replace if necessary**

Daimler AG ("DAG"), the manufacturer of Mercedes-Benz vehicles, has determined that on certain Model Year ("MY") 2018-2019 S-Class Coupe, S-Class, and SL-Class vehicles (217, 222, and 231 platforms) the trunk locking mechanism may not meet production specifications. As a result the trunk may require repeated attempts to close. An authorized Mercedes-Benz dealer will check the locking mechanism and replace it if necessary.

Prior to performing this Service Campaign:

- Please check VMI to determine if the vehicle is involved in the Campaign and if it has been previously repaired.
- Please review the entire Service Campaign bulletin and follow the repair procedure exactly as described.

Approximately 4436 vehicles are affected.

Order No. P-SC-2019030005

This bulletin has been created and maintained in accordance with MBUSA-SLP S423QH001, Document and Data Control, and MBUSA-SLP S424HH001, Control of Quality Records.

### Check/Test Procedure

1. Open the trunk lid and check the **orange** marking (A, figure 1) on the lock for the trunk lid.  
**i** To carry out the check, the lock must be locked using a suitable tool.

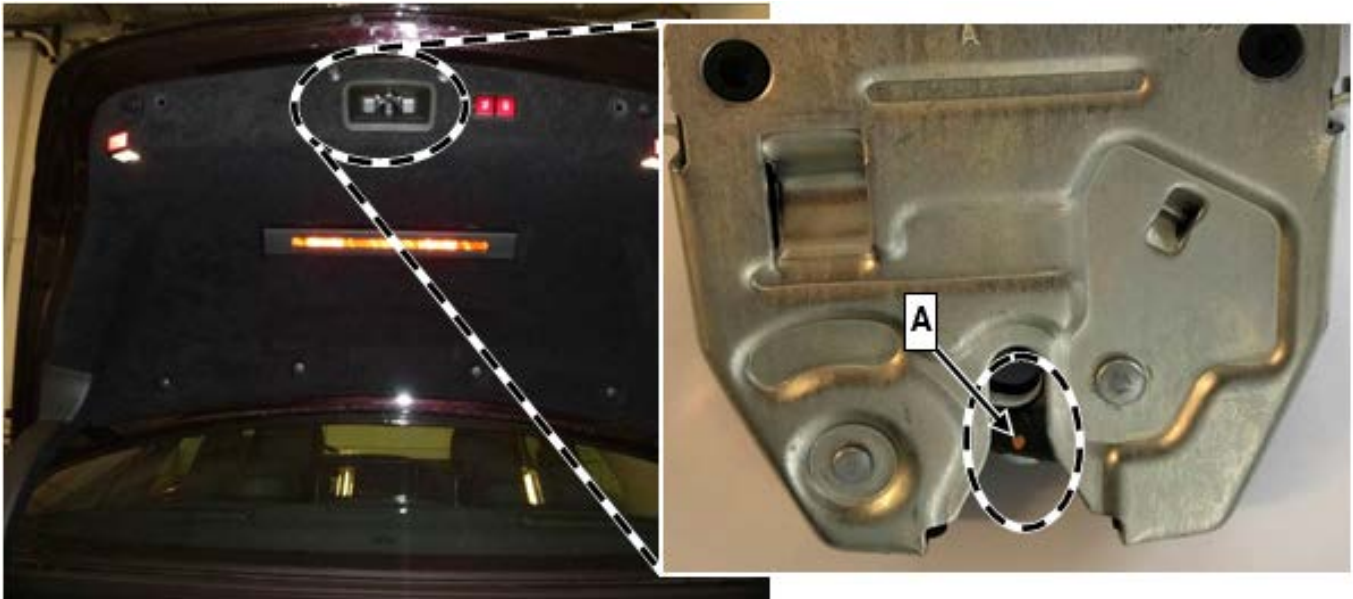


Figure 1

- a. **Orange** mark (A) on lock **not** present: Carry out **work procedure**.
- b. **Orange** mark (A) present on lock: **End measure**.

**i** The **findings** from the check/test procedure must be recorded **in writing in the work order**.

## Work procedure

### 1. Remove trim (**B**, figure 2).

- i** To do this, remove trim 1 and holder with warning triangle 2.  
Disconnect electrical connectors.

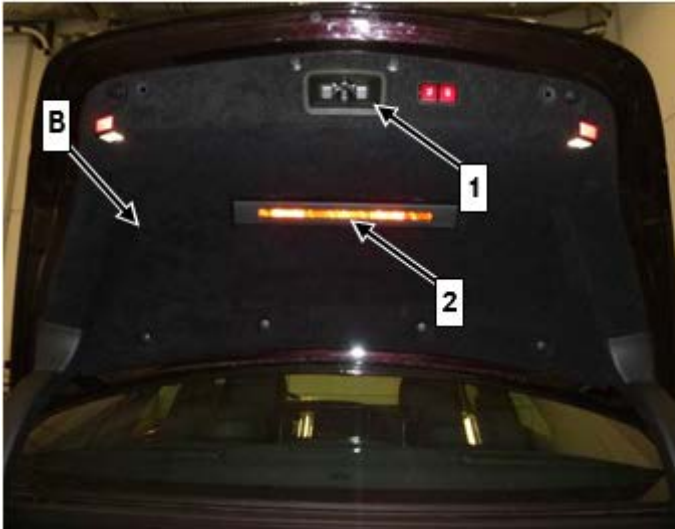


Figure 2

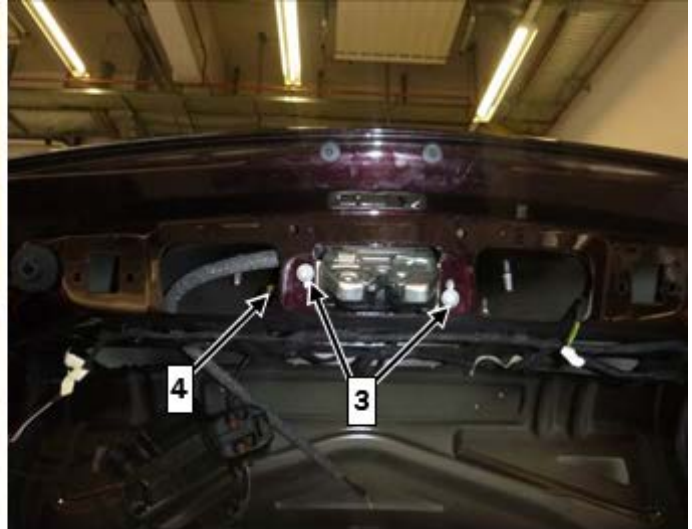


Figure 3

### 2. Remove lock for trunk lid (figure 3).

- i** To do so, remove screws (3, **Nm** 9) and disconnect connector (4).



Figure 4



Figure 5

### 3. Remove left cover (5, figure 4) in the trunk lid.

- i** To do so, release at 3 places (6).

### 4. Remove Bowden cable (7, figure 5) on the emergency release.

- i** **Installation:** Make sure that the Bowden cable is seated correctly.

### 5. Assemble in reverse order.

**Primary Parts Information**

<b>Qty.</b>	<b>Part Name</b>	<b>Part Number</b>	<b>Estimated Replacement Rate</b>
As required	Trunk lid lock	*	100%

\* Parts are to be determined using XPPI according to equipment code.

**Warranty Information****With Check**

**Operation:** Check trunk lid lock (02-2750)

<b>Damage Code</b>	<b>Operation Number</b>	<b>Labor Time (hrs.)</b>
80 910 01 8	02-2750	0.1

**With Check and Repair**

**Operation:** Check trunk lid lock (02-2750)

Replace trunk lid lock (after check) (02-2751)

<b>Damage Code</b>	<b>Operation Number</b>	<b>Labor Time (hrs.)</b>
80 910 01 7	02-2750	0.1
	02-2751	0.4

** Note**

Operation Number labor times are subject to change.